
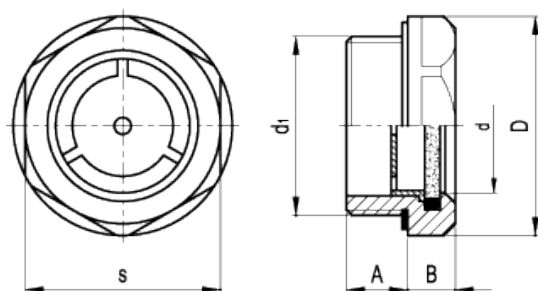


GN 743.2

Oil level indicators



american unit
metric unit

Elesa-Gantergriff		Main dimensions						Weight
Code	Description	d	d ₁	A	B	D	s	lbs g
GN.37421	GN 743.2-11-M16x1.5-A	0.43 11	- M16x1.5	0.31 8	0.3 7.5	0.87 22	0.79 20	0.042 19
GN.37425	GN 743.2-14-M20x1.5-A	0.55 14	- M20x1.5	0.33 8.5	0.3 7.5	1.02 26	0.91 23	0.051 23
GN.37430	GN 743.2-18-M26x1.5-A	0.71 18	- M26x1.5	0.35 9	0.31 8	1.26 32	1.18 30	0.097 44
GN.37431	GN 743.2-18-M27x1.5-A	0.71 18	- M27x1.5	0.35 9	0.31 8	1.26 32	1.18 30	0.101 46
GN.37436	GN 743.2-24-M33x1.5-A	0.94 24	- M33x1.5	0.43 11	0.33 8.5	1.57 40	1.42 36	0.154 70
GN.37423	GN 743.2-11-G3/8-A	0.43 11	- G 3/8	0.31 8	0.3 7.5	0.87 22	0.79 20	0.044 20
GN.37427	GN 743.2-14-G1/2-A	0.55 14	- G 1/2	0.33 8.5	0.3 7.5	1.02 26	0.91 23	0.051 23
GN.37434	GN 743.2-18-G3/4-A	0.71 18	- G 3/4	0.35 9	0.31 8	1.26 32	1.18 30	0.097 44
GN.37438	GN 743.2-24-G1-A	0.94 24	- G 1	0.43 11	0.33 8.5	1.57 40	1.42 36	0.152 69
GN.37422	GN 743.2-11-M16x1.5-B	0.43 11	- M16x1.5	0.31 8	0.3 7.5	0.87 22	0.79 20	0.042 19
GN.37426	GN 743.2-14-M20x1.5-B	0.55 14	- M20x1.5	0.33 8.5	0.3 7.5	1.02 26	0.91 23	0.051 23

Elesa-Gantergriff		Main dimensions						Weight
Code	Description	d	d ₁	A	B	D	s	lbs g
GN.37432	GN 743.2-18-M26x1.5-B	0.71 18	- M26x1.5	0.35 9	0.31 8	1.26 32	1.18 30	0.097 44
GN.37433	GN 743.2-18-M27x1.5-B	0.71 18	- M27x1.5	0.35 9	0.31 8	1.26 32	1.18 30	0.101 46
GN.37437	GN 743.2-24-M33x1.5-B	0.94 24	- M33x1.5	0.43 11	0.33 8.5	1.57 40	1.42 36	0.154 70
GN.37424	GN 743.2-11-G3/8-B	0.43 11	- G 3/8	0.31 8	0.3 7.5	0.87 22	0.79 20	0.044 20
GN.37428	GN 743.2-14-G1/2-B	0.55 14	- G 1/2	0.33 8.5	0.3 7.5	1.02 26	0.91 23	0.051 23
GN.37435	GN 743.2-18-G3/4-B	0.71 18	- G 3/4	0.35 9	0.31 8	1.26 32	1.18 30	0.097 44
GN.37439	GN 743.2-24-G1-B	0.94 24	- G 1	0.43 11	0.33 8.5	1.57 40	1.42 36	0.152 69

Material

Brass.

- Execution A: with technopolymer contrast screen.
- Execution B: without contrast screen.

Window

Natural glass.

Flat packing ring

NBR synthetic rubber.

Maximum continuous working temperature

210°F (100°C).

Accessories on request

Brass nut type [GH](#), for fitting to reservoirs with wall thickness smaller than 0.20" (5 mm).

Features and applications

GN 743.2 oil level indicators can be used on pressurised oil tanks (oil-proof resistance data available on request). The natural glass window is resistant to scratches.

The seal between the aluminium body and the glass window is guaranteed by a packing ring in NBR synthetic rubber.



STANDARD MACHINE ELEMENTS WORLDWIDE