


# GN 743.5

## Oil level indicators

**elesa**



**INOX**  
Stainless Steel

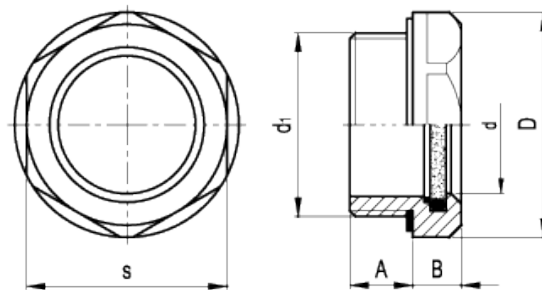

american unit  
metric unit

Elesa-Gantergriff		Main dimensions						Weight
Code	Description	d	d <sub>1</sub>	A	B	D	s	lbs g
GN.37462	GN 743.5-11-M16x1.5-B	0.43 11	- M16x1.5	0.31 8	0.3 7.5	0.87 22	0.79 20	0.042 19
GN.37466	GN 743.5-14-M20x1.5-B	0.55 14	- M20x1.5	0.33 8.5	0.3 7.5	1.02 26	0.91 23	0.051 23
GN.37470	GN 743.5-18-M26x1.5-B	0.71 18	- M26x1.5	0.35 9	0.31 8	1.26 32	1.18 30	0.09 41
GN.37474	GN 743.5-24-M33x1.5-B	0.94 24	- M33x1.5	0.43 11	0.33 8.5	1.57 40	1.42 36	0.141 64
GN.37478	GN 743.5-32-M42x1.5-B	1.26 32	- M42x1.5	0.47 12	0.35 9	1.97 50	1.81 46	0.225 102
GN.37464	GN 743.5-11-G3/8-B	0.43 11	- G 3/8	0.31 8	0.3 7.5	0.87 22	0.79 20	0.042 19
GN.37468	GN 743.5-14-G1/2-B	0.55 14	- G 1/2	0.33 8.5	0.3 7.5	1.02 26	0.91 23	0.051 23
GN.37472	GN 743.5-18-G3/4-B	0.71 18	- G 3/4	0.35 9	0.31 8	1.26 32	1.18 30	0.09 41
GN.37476	GN 743.5-24-G1-B	0.94 24	- G 1	0.43 11	0.33 8.5	1.57 40	1.42 36	0.141 64
GN.37479	GN 743.5-32-G1¼-B	1.26 32	- G 1¼	0.47 12	0.35 9	1.97 50	1.81 46	0.225 102

Material  
AISI 303 stainless steel.

Window  
ESG-glass.

Flat packing ring

FKM (type VITON®, registered trade mark of DuPont Dow Elastomers).

Maximum continuous working temperature  
350°F (180°C).

*Features and applications*

GN 743.5 oil level indicators can be used on pressurised oil tanks (oil-proof resistance data available on request ). The natural glass window is resistant to scratches.

The seal between the aluminium body and the glass window is guaranteed by an O-ring in FKM (type VITON®, registered trade mark of DuPont Dow Elastomers).

AISI 303 stainless steel, thanks to its high resistance to corrosion, allows the application of these oil level indicators on machines and equipment in those sectors where laws or particular hygienic, climatic and environmental factors make it mandatory to use corrosion resistant materials.



STANDARD MACHINE ELEMENTS WORLDWIDE