


HCX.

Column level indicators



ELESA Original design

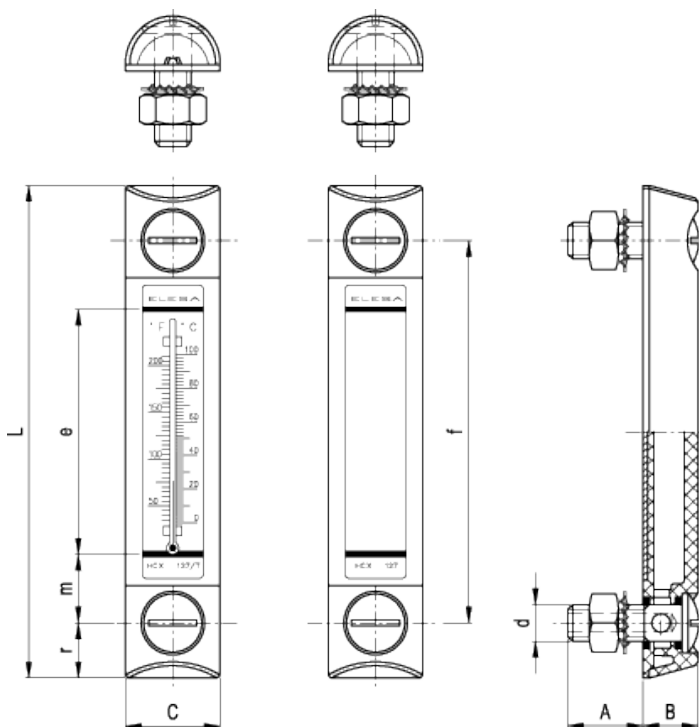


american unit
metric unit

Elesa Standards		Main dimensions									Thermometer scale		Weight
Code	Description	f	d	A	B	C	L	e	m	r	°C	°F	lbs g
11341	HCX.76-M10	2.99 76	- M10	0.87 22	0.63 16	1.06 27	4.21 107	1.57 40	0.71 18	0.61 15.5	- -	- -	0.192 87
11346	HCX.76/T-M10	2.99 76	- M10	0.87 22	0.63 16	1.06 27	4.21 107	1.57 40	0.71 18	0.61 15.5	- 20÷100	- 68÷210	0.192 87
11349	HCX.127-M10	5 127	- M10	0.91 23	0.71 18	1.22 31	6.34 161	3.15 80	0.91 23	0.67 17	- -	- -	0.304 138

Elesa Standards		Main dimensions									Thermometer scale		Weight
Code	Description	f	d	A	B	C	L	e	m	r	°C	°F	lbs g
11354	HCX.127/T-M10	5 127	- M10	0.91 23	0.71 18	1.22 31	6.34 161	3.15 80	0.91 23	0.67 17	- 0+100	- 32+210	0.304 138
11351	HCX.127-M12	5 127	- M12	0.91 23	0.71 18	1.22 31	6.34 161	3.15 80	0.91 23	0.67 17	- -	- -	0.304 138
11356	HCX.127/T-M12	5 127	- M12	0.91 23	0.71 18	1.22 31	6.34 161	3.15 80	0.91 23	0.67 17	- 0+100	- 32+210	0.304 138
11361	HCX.254-M12	10 254	- M12	0.83 21	0.71 18	1.38 35	11.46 291	7.99 203	1.02 26	0.73 18.5	- -	- -	0.407 185
11366	HCX.254/T-M12	10 254	- M12	0.83 21	0.71 18	1.38 35	11.46 291	7.99 203	1.02 26	0.73 18.5	- 0+100	- 32+210	0.407 185

Drilling template

Holes without burrs and chamfer

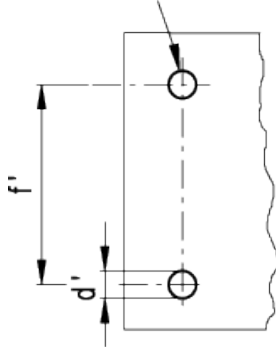

Drilling and installation data

Description	d' $_{-0.008}$	f' $_{\pm 0.008}$	Maximum tightening torque [ft-lbf] [Nm]
HCX.76	0.41 10.5	2.99 76	9 12
HCX.127 (M10)	0.41 10.5	5 127	9 12
HCX.127 (M12)	0.49 12.5	5 127	9 12
HCX.254	0.49 12.5	10 254	7 10

Material

Transparent polyamide based (PA-T) technopolymer. Highly resistant to shocks, solvents, oils with additives, aliphatic and aromatic hydrocarbons, petrol, naphtha, phosphoric esters. Avoid contact with alcohol or detergents containing alcohol.

Screws, nuts and washers

Zinc-plated steel.

Packing rings

NBR synthetic rubber O-Ring.

Contrast screen

White lacquered aluminium. The housing, in the appropriate external rear slot, guarantees the best protection from direct contact with fluid, avoiding yellowing effect due to the prolonged action of the fluid at high temperatures.

It can be removed before installation to fit marks and words (for example MAX-MIN).

Thermometer

HCX/T: incorporated thermometer for temperature reading.

Assembly

- When nuts can be fitted from the inside of the reservoir, by means of the supplied set screws and nuts.
- When nuts cannot be fitted from the inside of the reservoir and the walls are thick enough, by means of the supplied set screws, without nuts, by tapping the two holes in the reservoir walls.
- When nuts cannot be fitted from the inside of the reservoir and the walls are not thick enough, by means of the supplied set screws and the [Fast Mounting Kit](#) (for HCX.76 and HCX.127).

To ensure the best sealing of the O-rings it is recommended to apply the maximum torque on the nuts as reported in the table and a roughness of the gasket application surface $R_a = 3 \mu\text{m}$.

Maximum continuous working temperature

190°F (90°C) (with oil).

Features and performances

Assembled using ultrasound welding to guarantee a perfect seal. Entirely in transparent material: maximum fluid level visibility even from side positions. Visibility and temperature reading magnified by lens effect.

Technical data

In laboratory tests carried out with mineral oil for hydraulic systems type CB68 (according to ISO 3498) with gradually increasing pressure, at 73°F (23°C), the weld stood up as follows:

- HCX.76 18 bar
- HCX.127 18 bar
- HCX.254 12 bar

In any case we suggest to verify the suitability of the product under the actual working conditions. If you need to use the indicator with other oils or fluids and under different pressure and temperature conditions, please contact ELESA Technical Department or carry out tests in order to guarantee a proper use.

Other standard executions

- [HCX/AR](#) for use with fluids containing alcohol.
- [HCX.INOX-BW](#) for use with hot water.



STANDAARD MACHINE ELEMENTS WORLDWIDE

ELESA models all rights reserved in accordance with the law. Always mention the source when reproducing our drawings.