


# LV.A-125-ACV

## Levelling elements



ELESA Original design

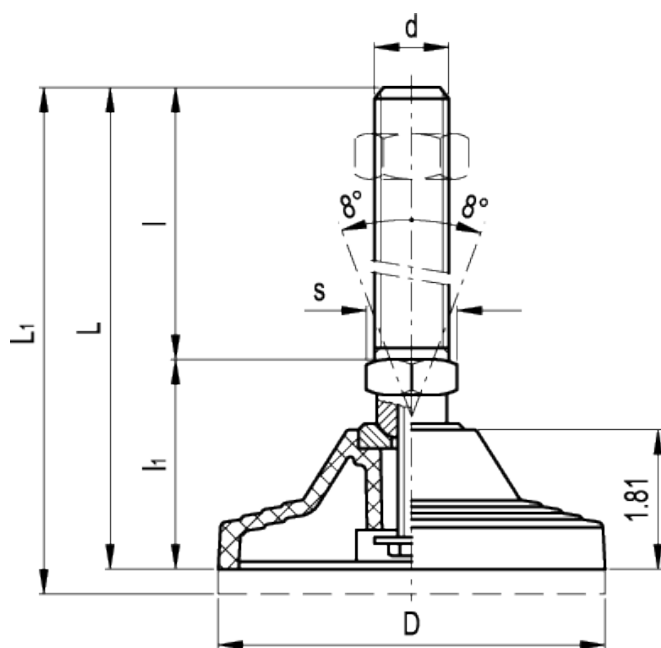

american unit  
metric unit

Without no-slip disk		With no-slip disk		Main dimensions				Threaded stem		Wrench	Max limit static load*	Weight	
Code	Description	Code	Description	D	L	L <sub>1</sub> #	l <sub>1</sub>	d	l	s	[lbf] [N]	lbs g	lbs# g
306921	LV.A-125-ACV-M20x136	310921	LV.A-125-ACV-AS-M20x136	4.92 125	7.87 200	8.27 210	2.52 64	- M20	5.35 136	0.94 24	8960 40000	1.278 580	1.828 830
306925	LV.A-125-ACV-M20x186	310925	LV.A-125-ACV-AS-M20x186	4.92 125	9.84 250	10.24 260	2.52 64	- M20	7.32 186	0.94 24	8960 40000	1.52 690	2.07 940
306931	LV.A-125-ACV-M24x136	310931	LV.A-125-ACV-AS-M24x136	4.92 125	7.87 200	8.27 210	2.52 64	- M24	5.35 136	0.94 24	8960 40000	1.608 730	2.159 980
306935	LV.A-125-ACV-M24x186	310935	LV.A-125-ACV-AS-M24x186	4.92 125	9.84 250	10.24 260	2.52 64	- M24	7.32 186	0.94 24	8960 40000	1.85 840	2.401 1090
306941	LV.A-125-ACV-M30x136	310941	LV.A-125-ACV-AS-M30x136	4.92 125	7.87 200	8.27 210	2.52 64	- M30	5.35 136	1.18 30	8960 40000	2.07 940	2.621 1190
306945	LV.A-125-ACV-M30x186	310945	LV.A-125-ACV-AS-M30x186	4.92 125	9.84 250	10.24 260	2.52 64	- M30	7.32 186	1.18 30	8960 40000	2.269 1030	2.819 1280

Without no-slip disk		With no-slip disk		Main dimensions				Threaded stem		Wrench	Max limit static load*	Weight	
Code	Description	Code	Description	D	L	L <sub>1#</sub>	l <sub>1</sub>	d	l	s	[lbf] [N]	lbs g	lbs# g

\* "Max limit static load" means the value over which the applied load to the element, in certain conditions of use, may cause plastic material deformation. # Data with no-slip disk mounted.

#### Base

Glass-fibre reinforced polyamide based (PA) technopolymer. Resistant to solvents, oils, greases and other chemical agents.

#### Colour

Black, matte finish.

#### Articulated through stem

Threaded zinc-plated steel and regulation hexagon.

#### Stem-base assembly

Zinc-plated steel set screw and washer.

#### Cap washer

Zinc-plated steel.

#### No-slip disk

NBR synthetic rubber, hardness 90 Shore A.

#### Standard executions

- LV.A: without no-slip disk.
- LV.A-AS: with no-slip disk, supplied assembled, reinforced with a zinc-plated steel plate and fixed by means of two screws.

#### Accessories on request

Zinc-plated steel nut to be ordered separately (see Nuts [NT.](#)).

#### Special executions on request (For sufficient quantities)

AISI 304 stainless steel stems.

#### Features and applications

The light knurling under the lower lip of the levelling element provides excellent stability and grip when using the levelling element without no-slip disk even on surfaces that are not perfectly flat.  
The levelling element is supplied assembled.

