



CMT.AE-VO

Latches with fold-away knob

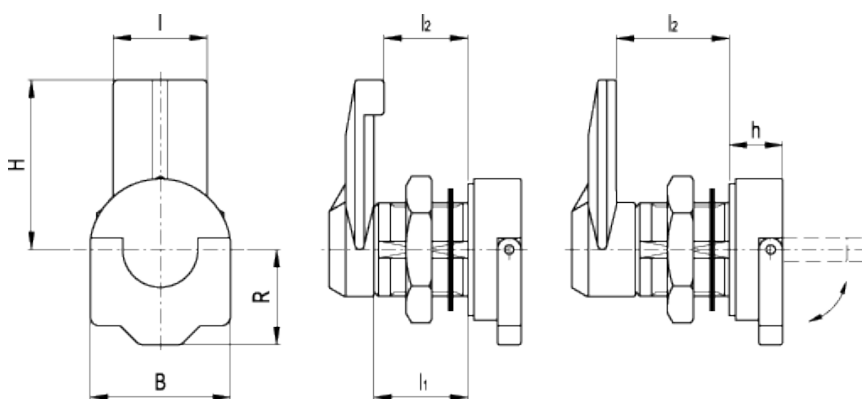

Drilling template

american unit
metric unit



Elesa Standards		Main dimensions							Weight
Code	Description	H	l ₂	B	R	h	l	l ₁	lbs g
421243	CMT.32-18 AE-VO	1.26 32	0.71 18	1.18 30	0.79 20	0.43 11	0.79 20	0.79 20	0.059 27
421241	CMT.32-20 AE-VO	1.26 32	0.79 20	1.18 30	0.79 20	0.43 11	0.79 20	0.79 20	0.057 26
421245	CMT.32-24 AE-VO	1.26 32	0.94 24	1.18 30	0.79 20	0.43 11	0.79 20	0.79 20	0.062 28
421247	CMT.32-32 AE-VO	1.26 32	1.26 32	1.18 30	0.79 20	0.43 11	0.79 20	0.79 20	0.066 30

Material

Rotor, stator, fold-away knob, closing lever and nut (M22x1.5) in glass-fibre reinforced polyamide based (PA) technopolymer certified self-extinguish UL-94 V0. Resistant to solvents, oils, greases and other chemical agents.

Colour

Black, matte finish.

Sealing washer
SBR rubber.

Self-tapping screw
Zinc-plated steel.

Rotation
90°.

IP protection
IP 65 protection class, according to [IEC 529 table](#).

Special executions on request (For sufficient quantities)
Cylindrical body of the closing lever in other dimensions.

Technical data

The "V0" certification in accordance with UL-94 V (Underwriters Laboratories) (see [Technical Data](#)) indicates that on a plastic test sample with specific shape and dimensions, in the vertical position, the flame is extinguished within 10 seconds, without generating incandescent drops.



STANDAARD MACHINE ELEMENTS WORLDWIDE